




# MICAPS

## MD4K1330OLED HDMI Displayer

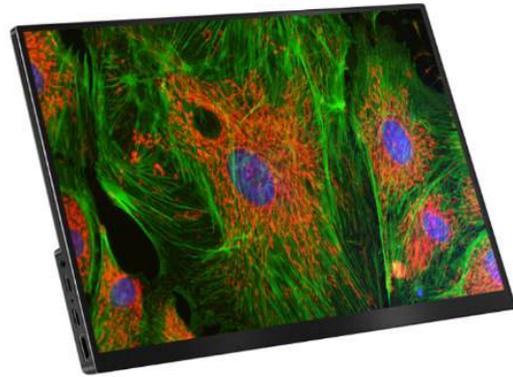

The MD4K1330OLED is designed to work seamlessly with Micaps ECO series HDMI cameras, offering a high-definition 4K display for clear and detailed imaging. It features a premium IPS OLED panel, providing wide viewing angles and high contrast for an exceptional visual experience. When paired with an ECO HDMI camera, the MD4K1330OLED delivers a simple, flexible, and intuitive imaging and display solution—perfect for professional applications. Its outstanding performance enables fast frame rates and excellent color accuracy, bringing out the full potential of the ECO HDMI camera series.

### Features

- True 4K HDMI displayer
- 13.3 inch active area
- IPS LCD panel, 178 degree wide viewing angle
- HDR dynamic image enhancement
- 100% SRGB primary gamut
- 400cd/m2display brightness, high contrast ratio up to 100000:1
- Standard HDMI interface
- 4mm narrow frame design on three sides, with 90% of the screen area, great visual experience
- No delay is felt with 3ms response, and dynamic definition is optimized to keep the picture stable and clear
- Without residual shadow
- Connect computer to realize screen projection, splitting and expansion
- Integrated invisible folding support, easy viewing angle adjustment
- Easy to connect with HDMI camera


Model	Active Area(Inch)	Video Fomat	Resolution	Contrast	Color Gamut	View Angle	Touch Function
MD4K1330OLED	13.3	HDMI	4K	100000:1	100%	IPS Full View(178°)	NA

### Specification

Basic performance	
MD4K1330OLED	Common/touch, 2 means square
LCD Panel	OLED
Input Video Format	HDMI
Native Resolution	3840 x 2160
Display Type	16:9 Ratio 13.3 Inch Active Matrix Super TFT LCD
Typical Contrast Ratio	100000:1
Colors	16.7 Million
Viewing Angle(L/R/U/D)	IPS Full View(178°)
Active Display Area	295mm(W) × 165mm(H)
Pixel Pitch	0.154(W) X 0.154(H) mm
Refresh Rate	60Hz
Brightness	400cd/m 2
Backlight	LED Backlight, 50000 hours

Outline Parameter	
Color	Black
Dimension	306(L)*183(H)*8(T) mm
Weight	560g

Operating Environment	
Operating Temperature	-15 Degree~55 Degree
Humidity Non Condensing	Operating:10%-90%, Storage: 5%-90%
Synchronization Range	30-80 KHz Horizontal, 55-75 Hz Vertical
Power Supply	AC110V-220V /DC5~12V(1A ) (Type C)
Power Consumption	Max 12W

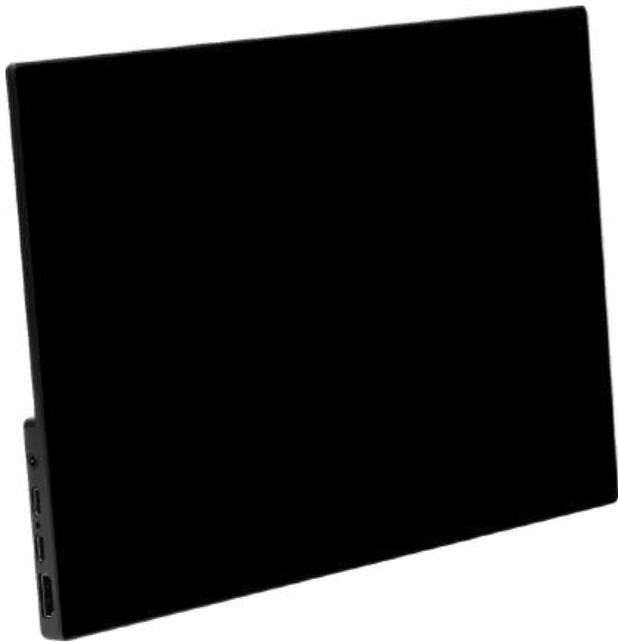

Back View of MD4K1330LED Displayer and HDMI Camera's Connection

**LABLINK INSTRUMENTS**

- Plot no. 337, Sector 2, HSIIDC Saha, Saha, Ambala (Haryana) India - 133104.
- Plot no 3-6-164/2, 2nd Street, Hyderguda Himayatnagar, Hyderabad (Telangana )India - 500029

**Contact us:**

Email:- [info@lablinkinstruments.com](mailto:info@lablinkinstruments.com)  
[www.lablinkinstruments.com](http://www.lablinkinstruments.com), [www.micaps.com](http://www.micaps.com)

